
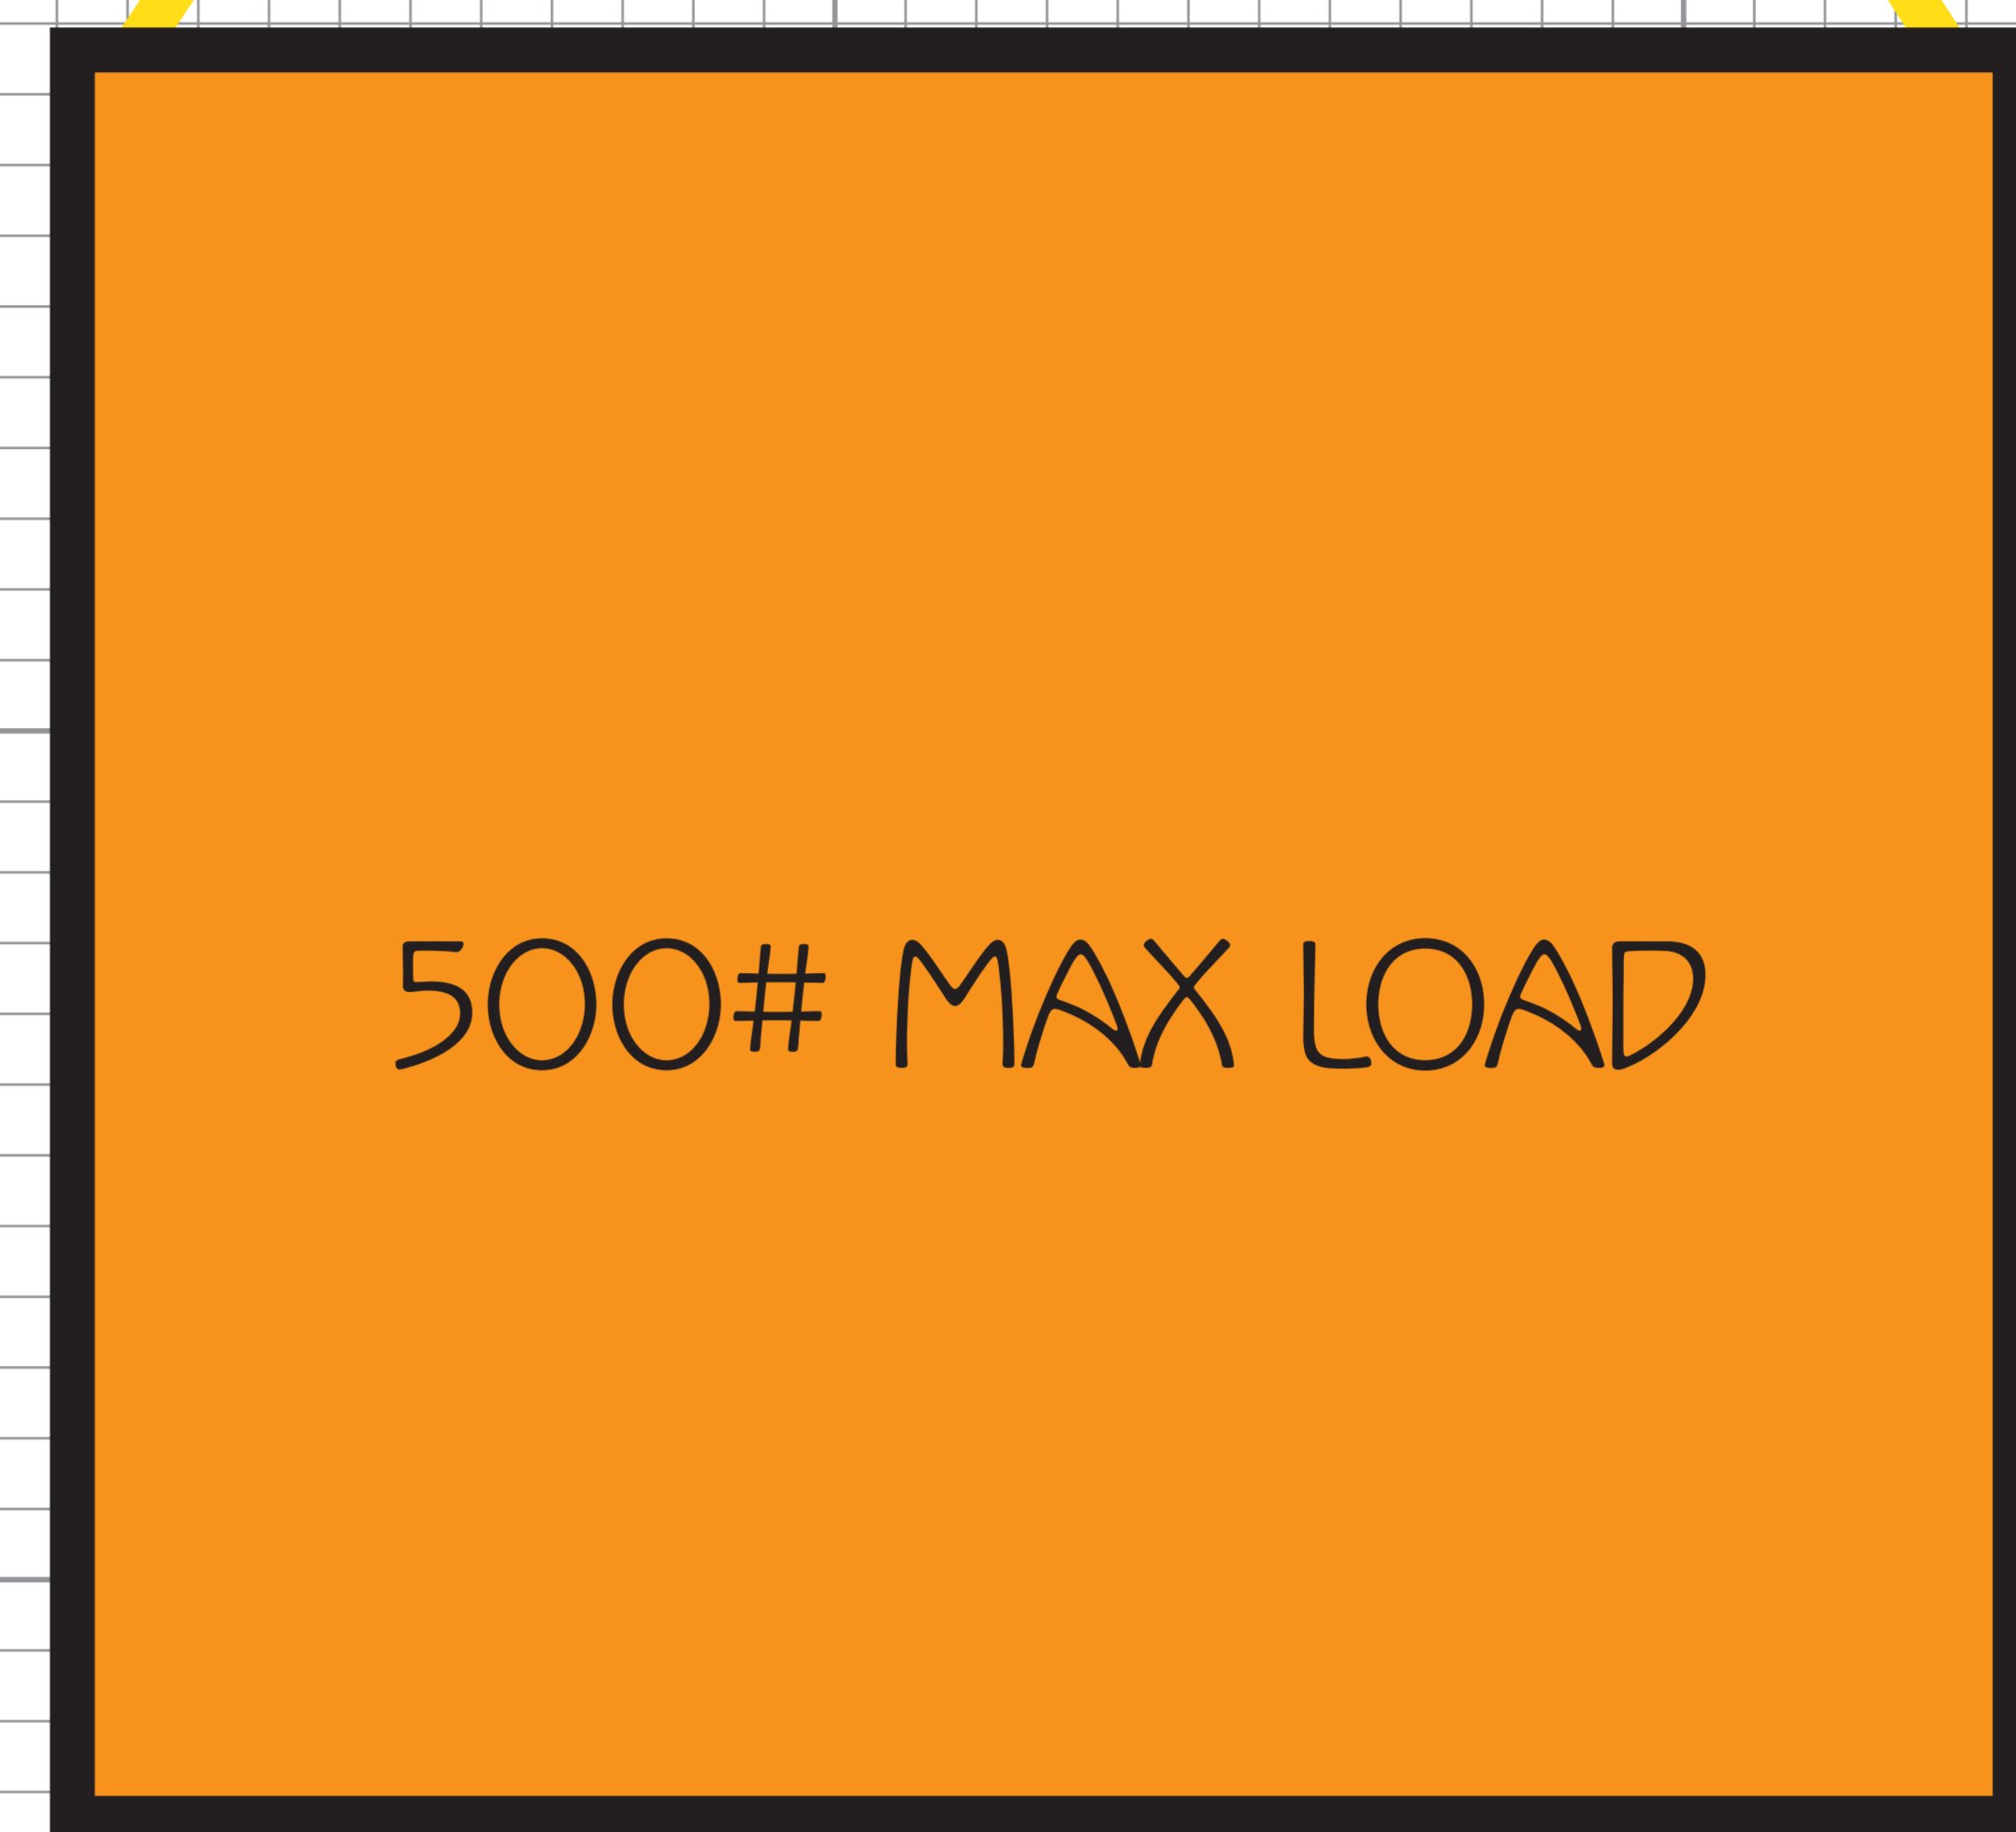



4000 PSI CONCRETE IN 18" X 58" SONOTUBE  
 TOTAL WEIGHT 1000#  
 8 CU FT  
 14-80# BAGS  
 18-60# BAGS

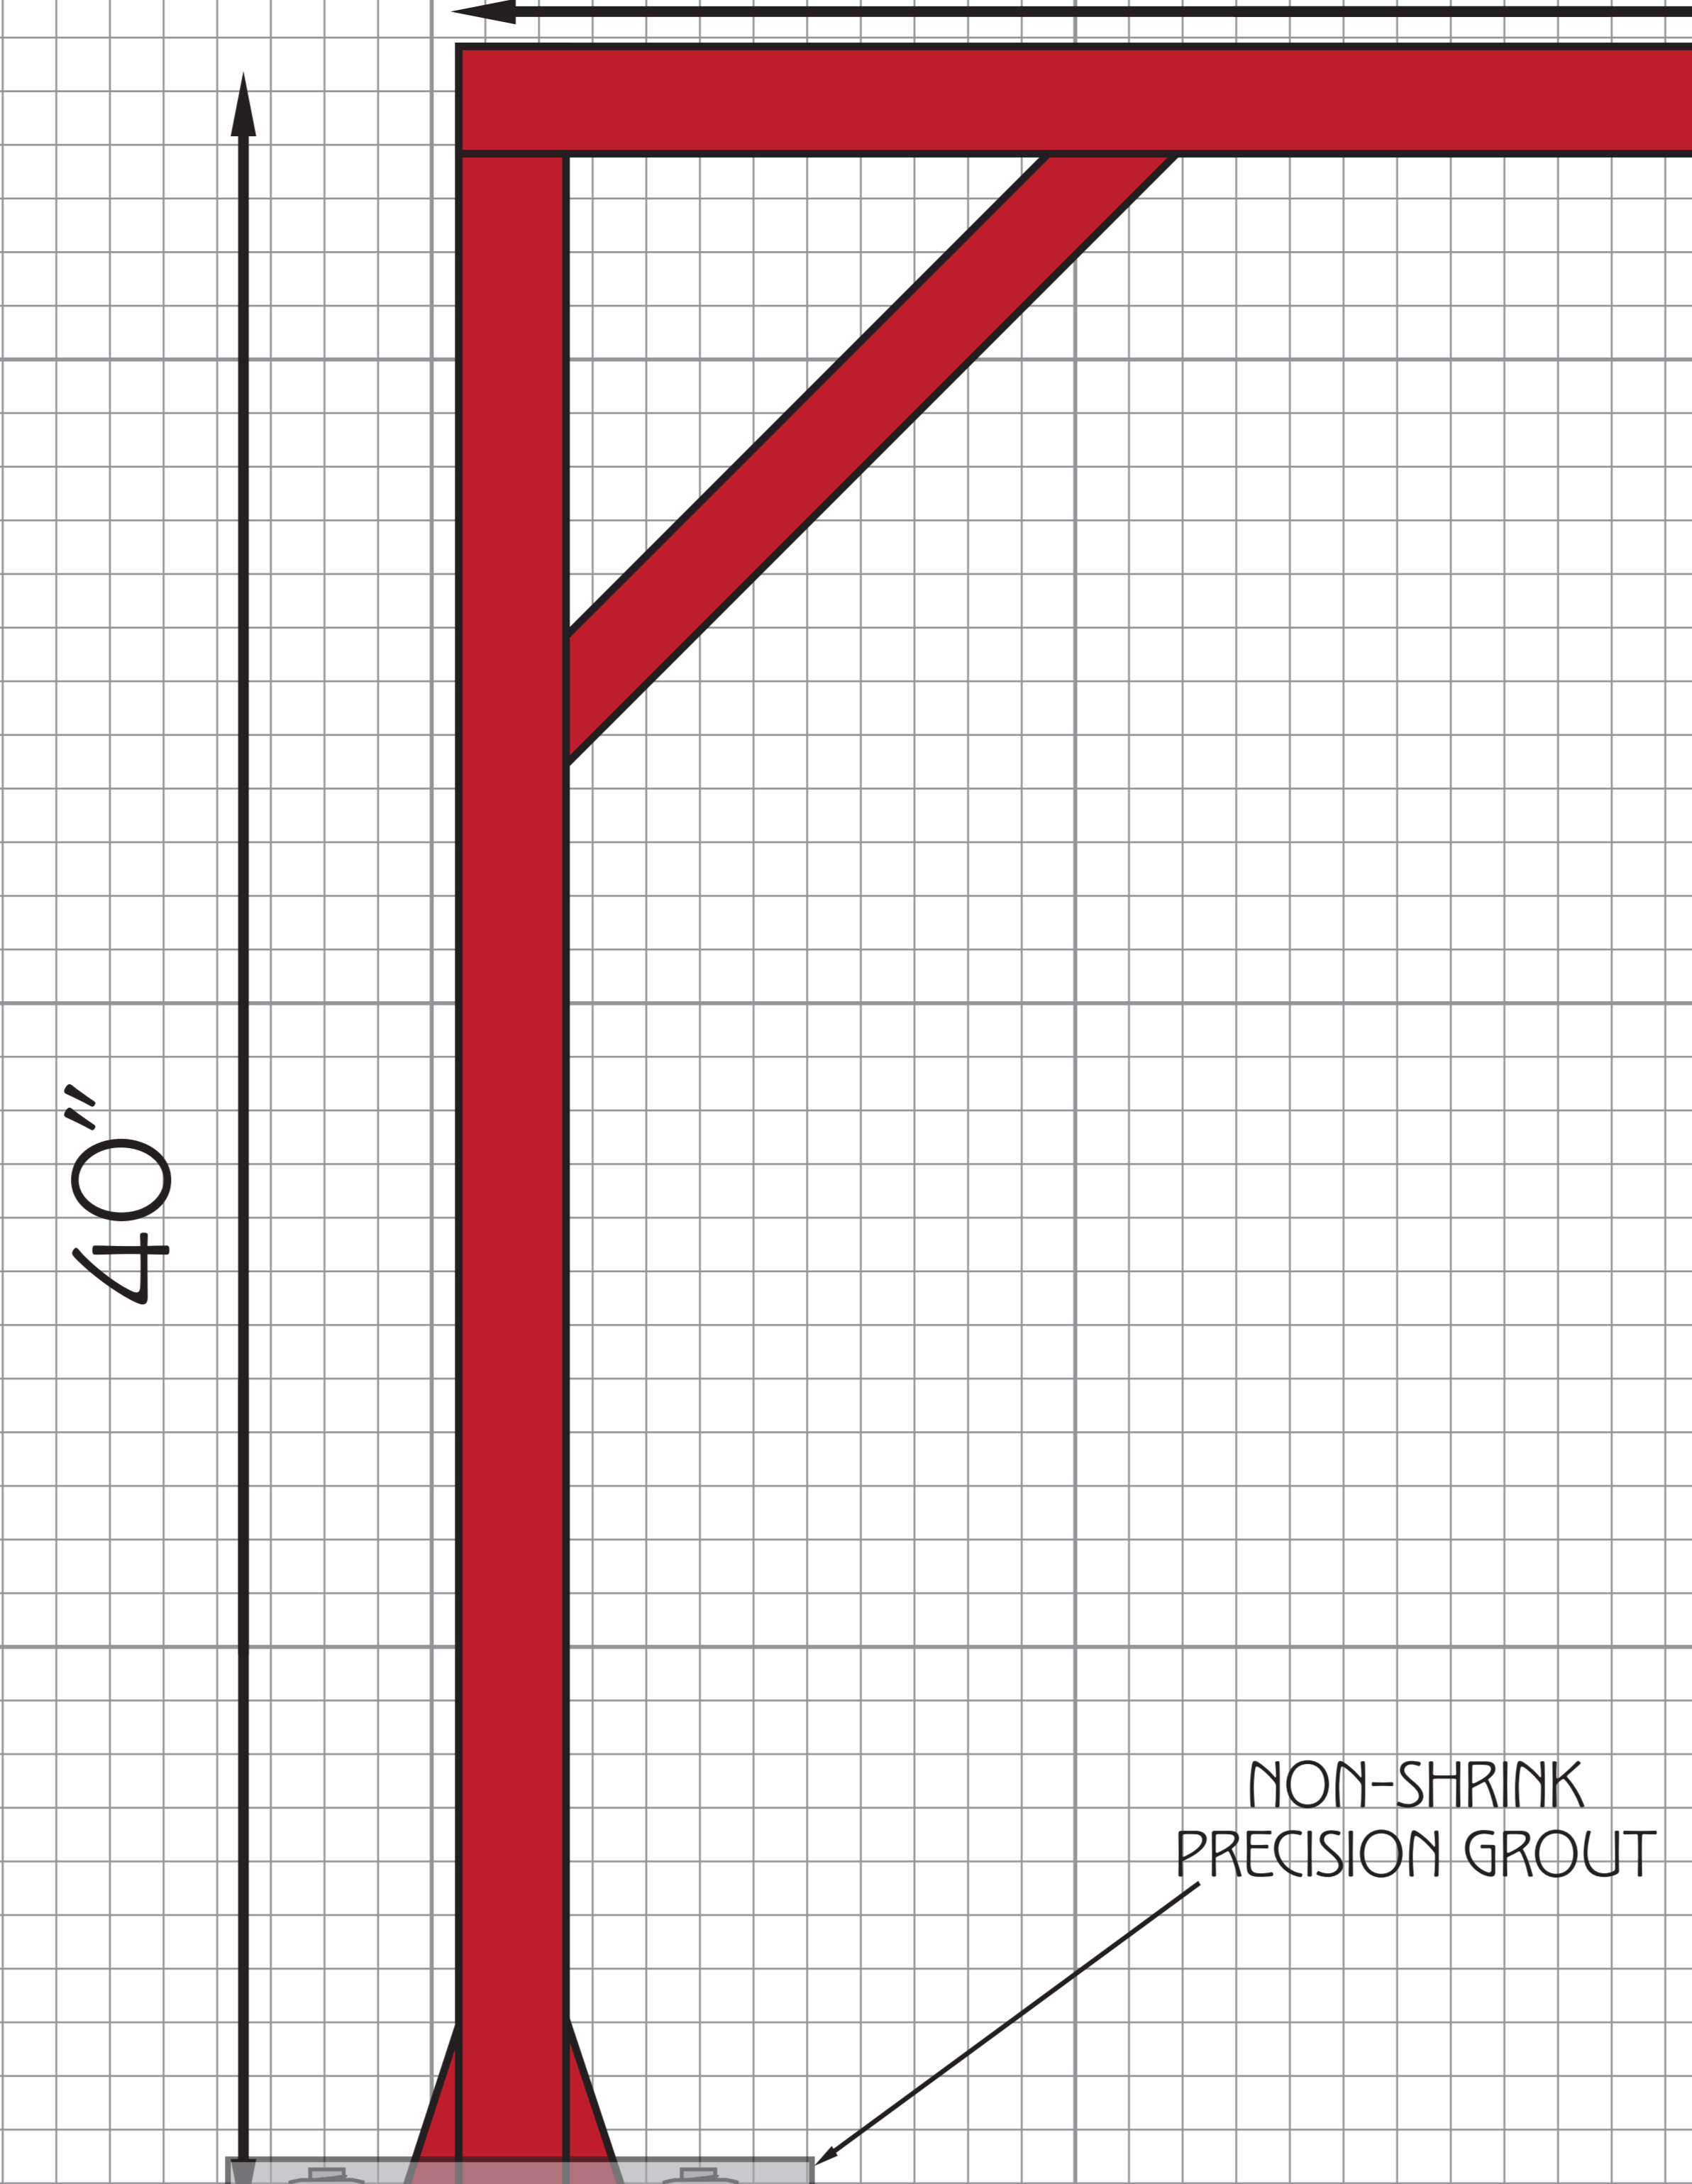


**REBAR COLUMN**  
 6X96" (#5) - VERTICALS  
 9X12" (#4) - STIRRUPS

**REBAR BASE**  
 14X24" (#5) - VERTICALS  
 5X110" (#4) - HORIZONTAL RECTANGLES  
 30X14" (#4) - HORIZONTAL SUPPORTS  
 5X30" (#4) - CROSS MEMBERS

GRADE

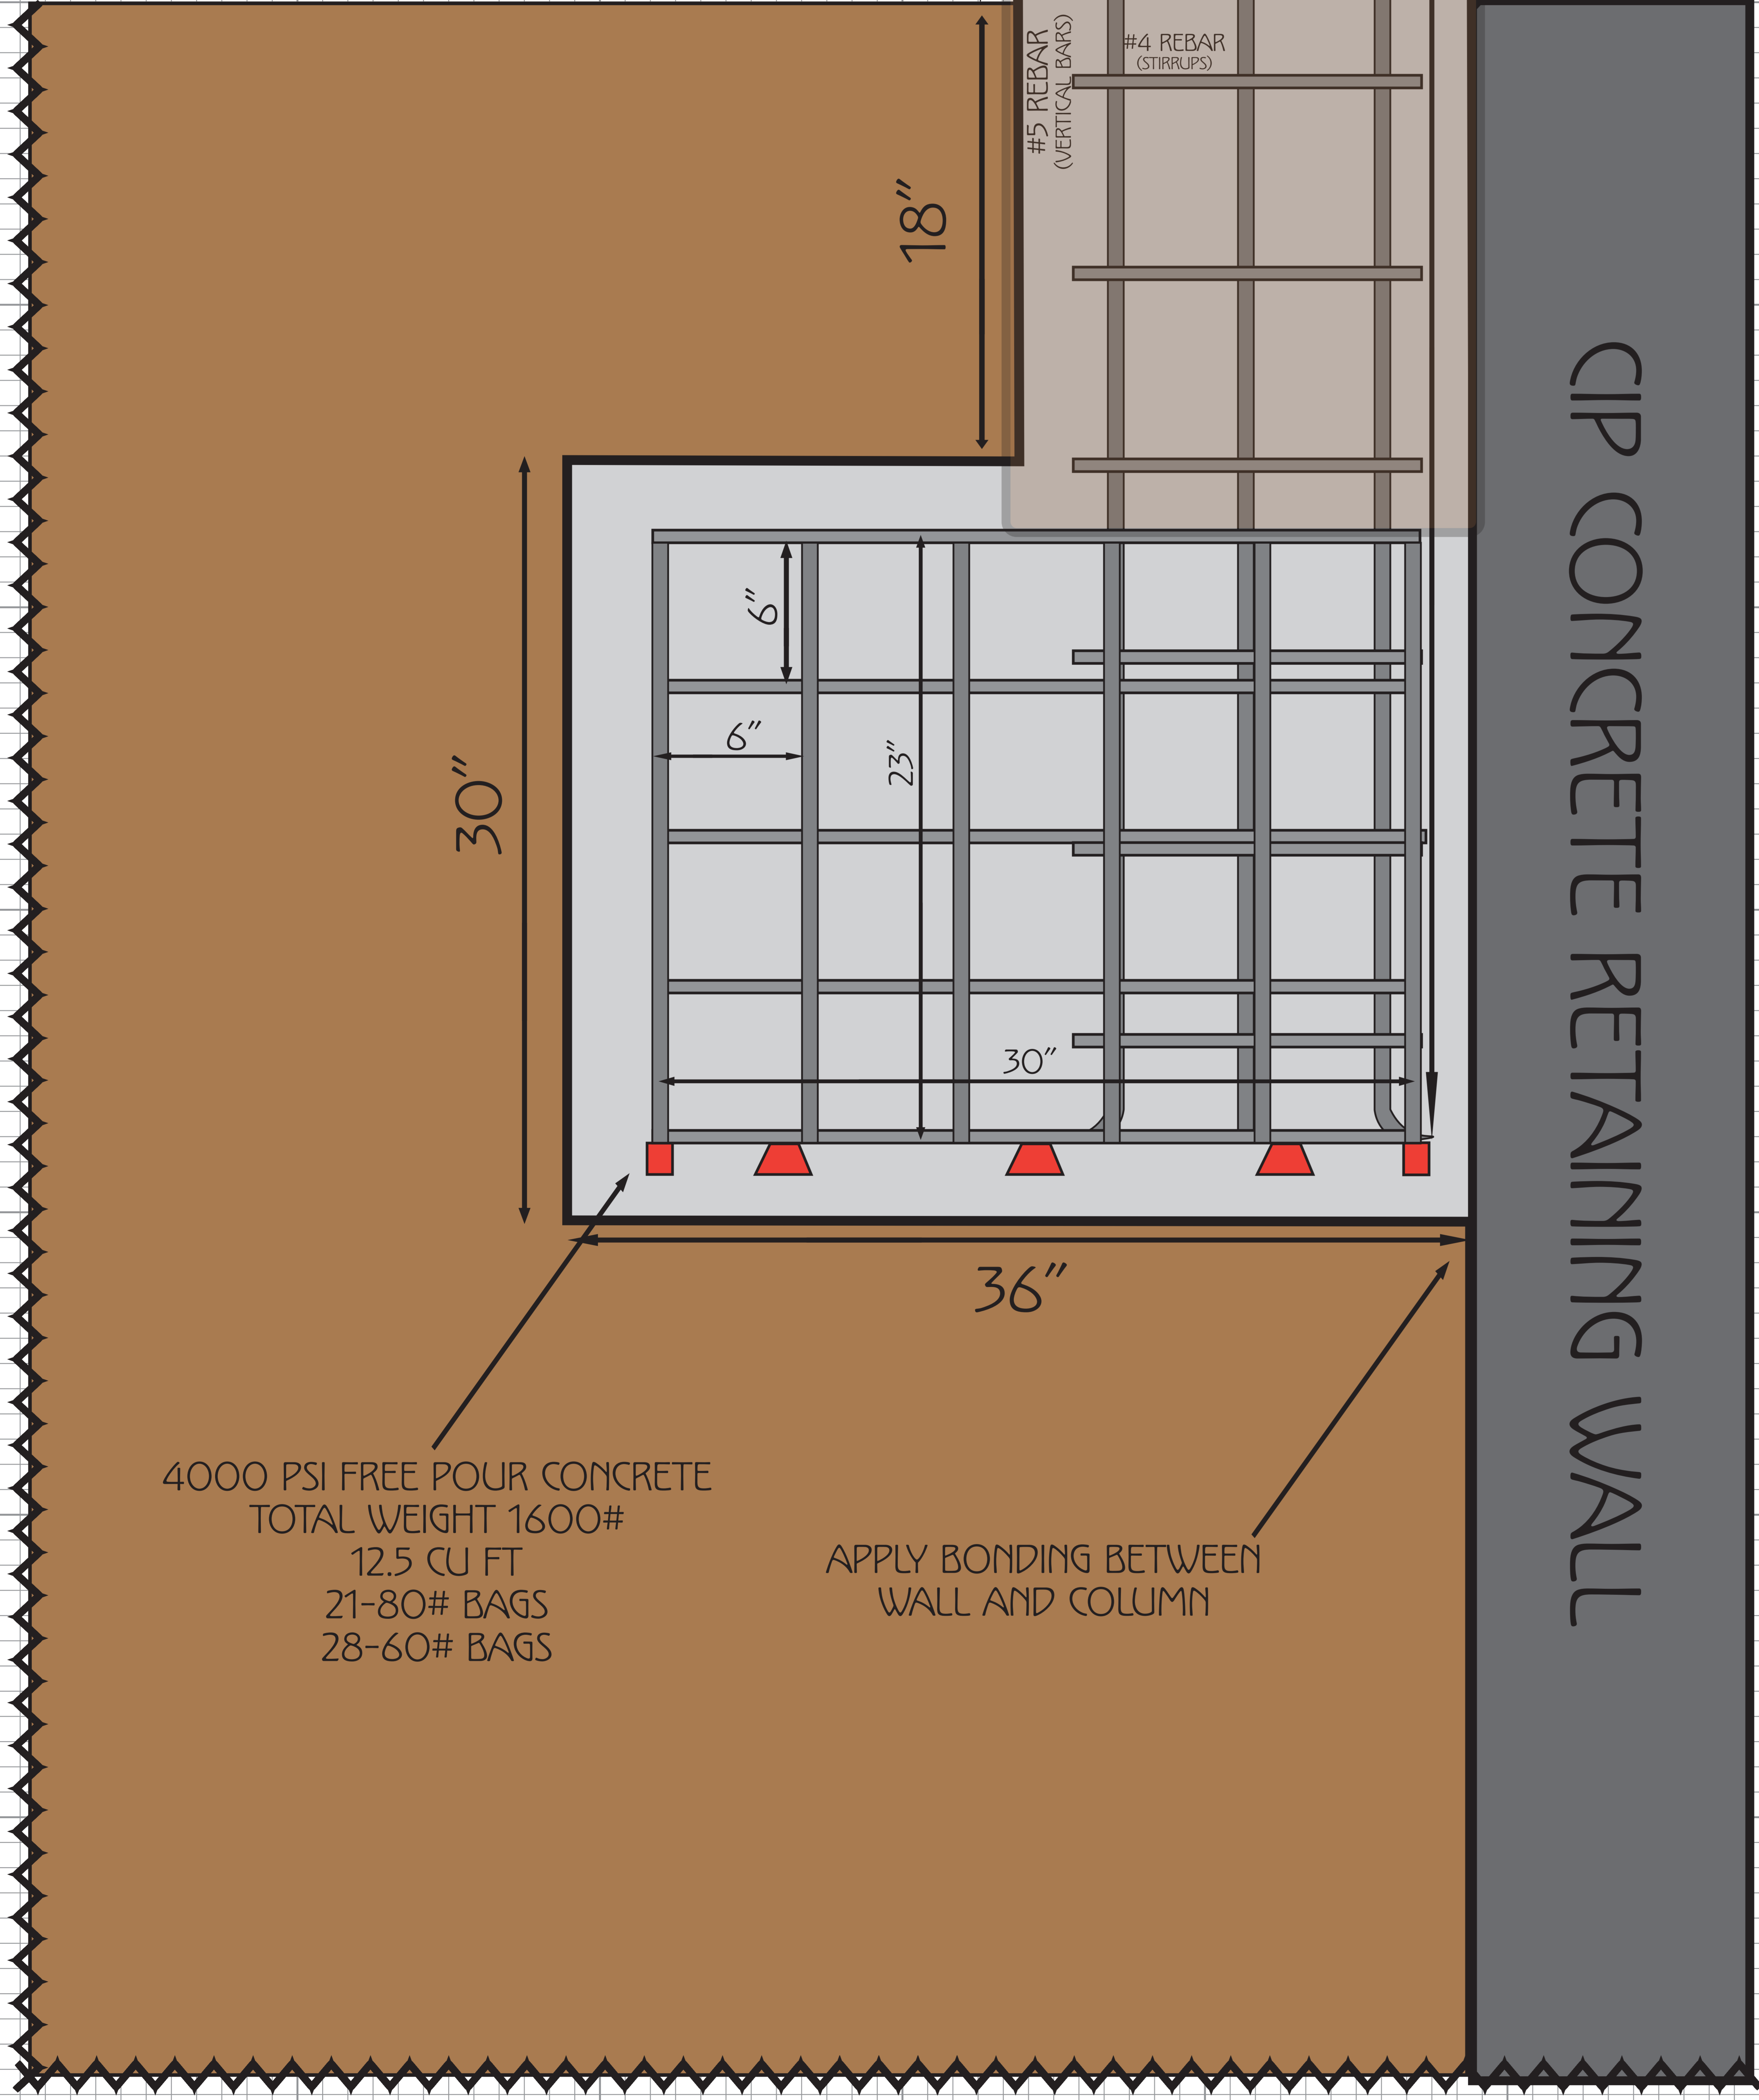

4000 PSI FREE POUR CONCRETE  
 TOTAL WEIGHT 1600#  
 12.5 CU FT  
 21-80# BAGS  
 28-60# BAGS

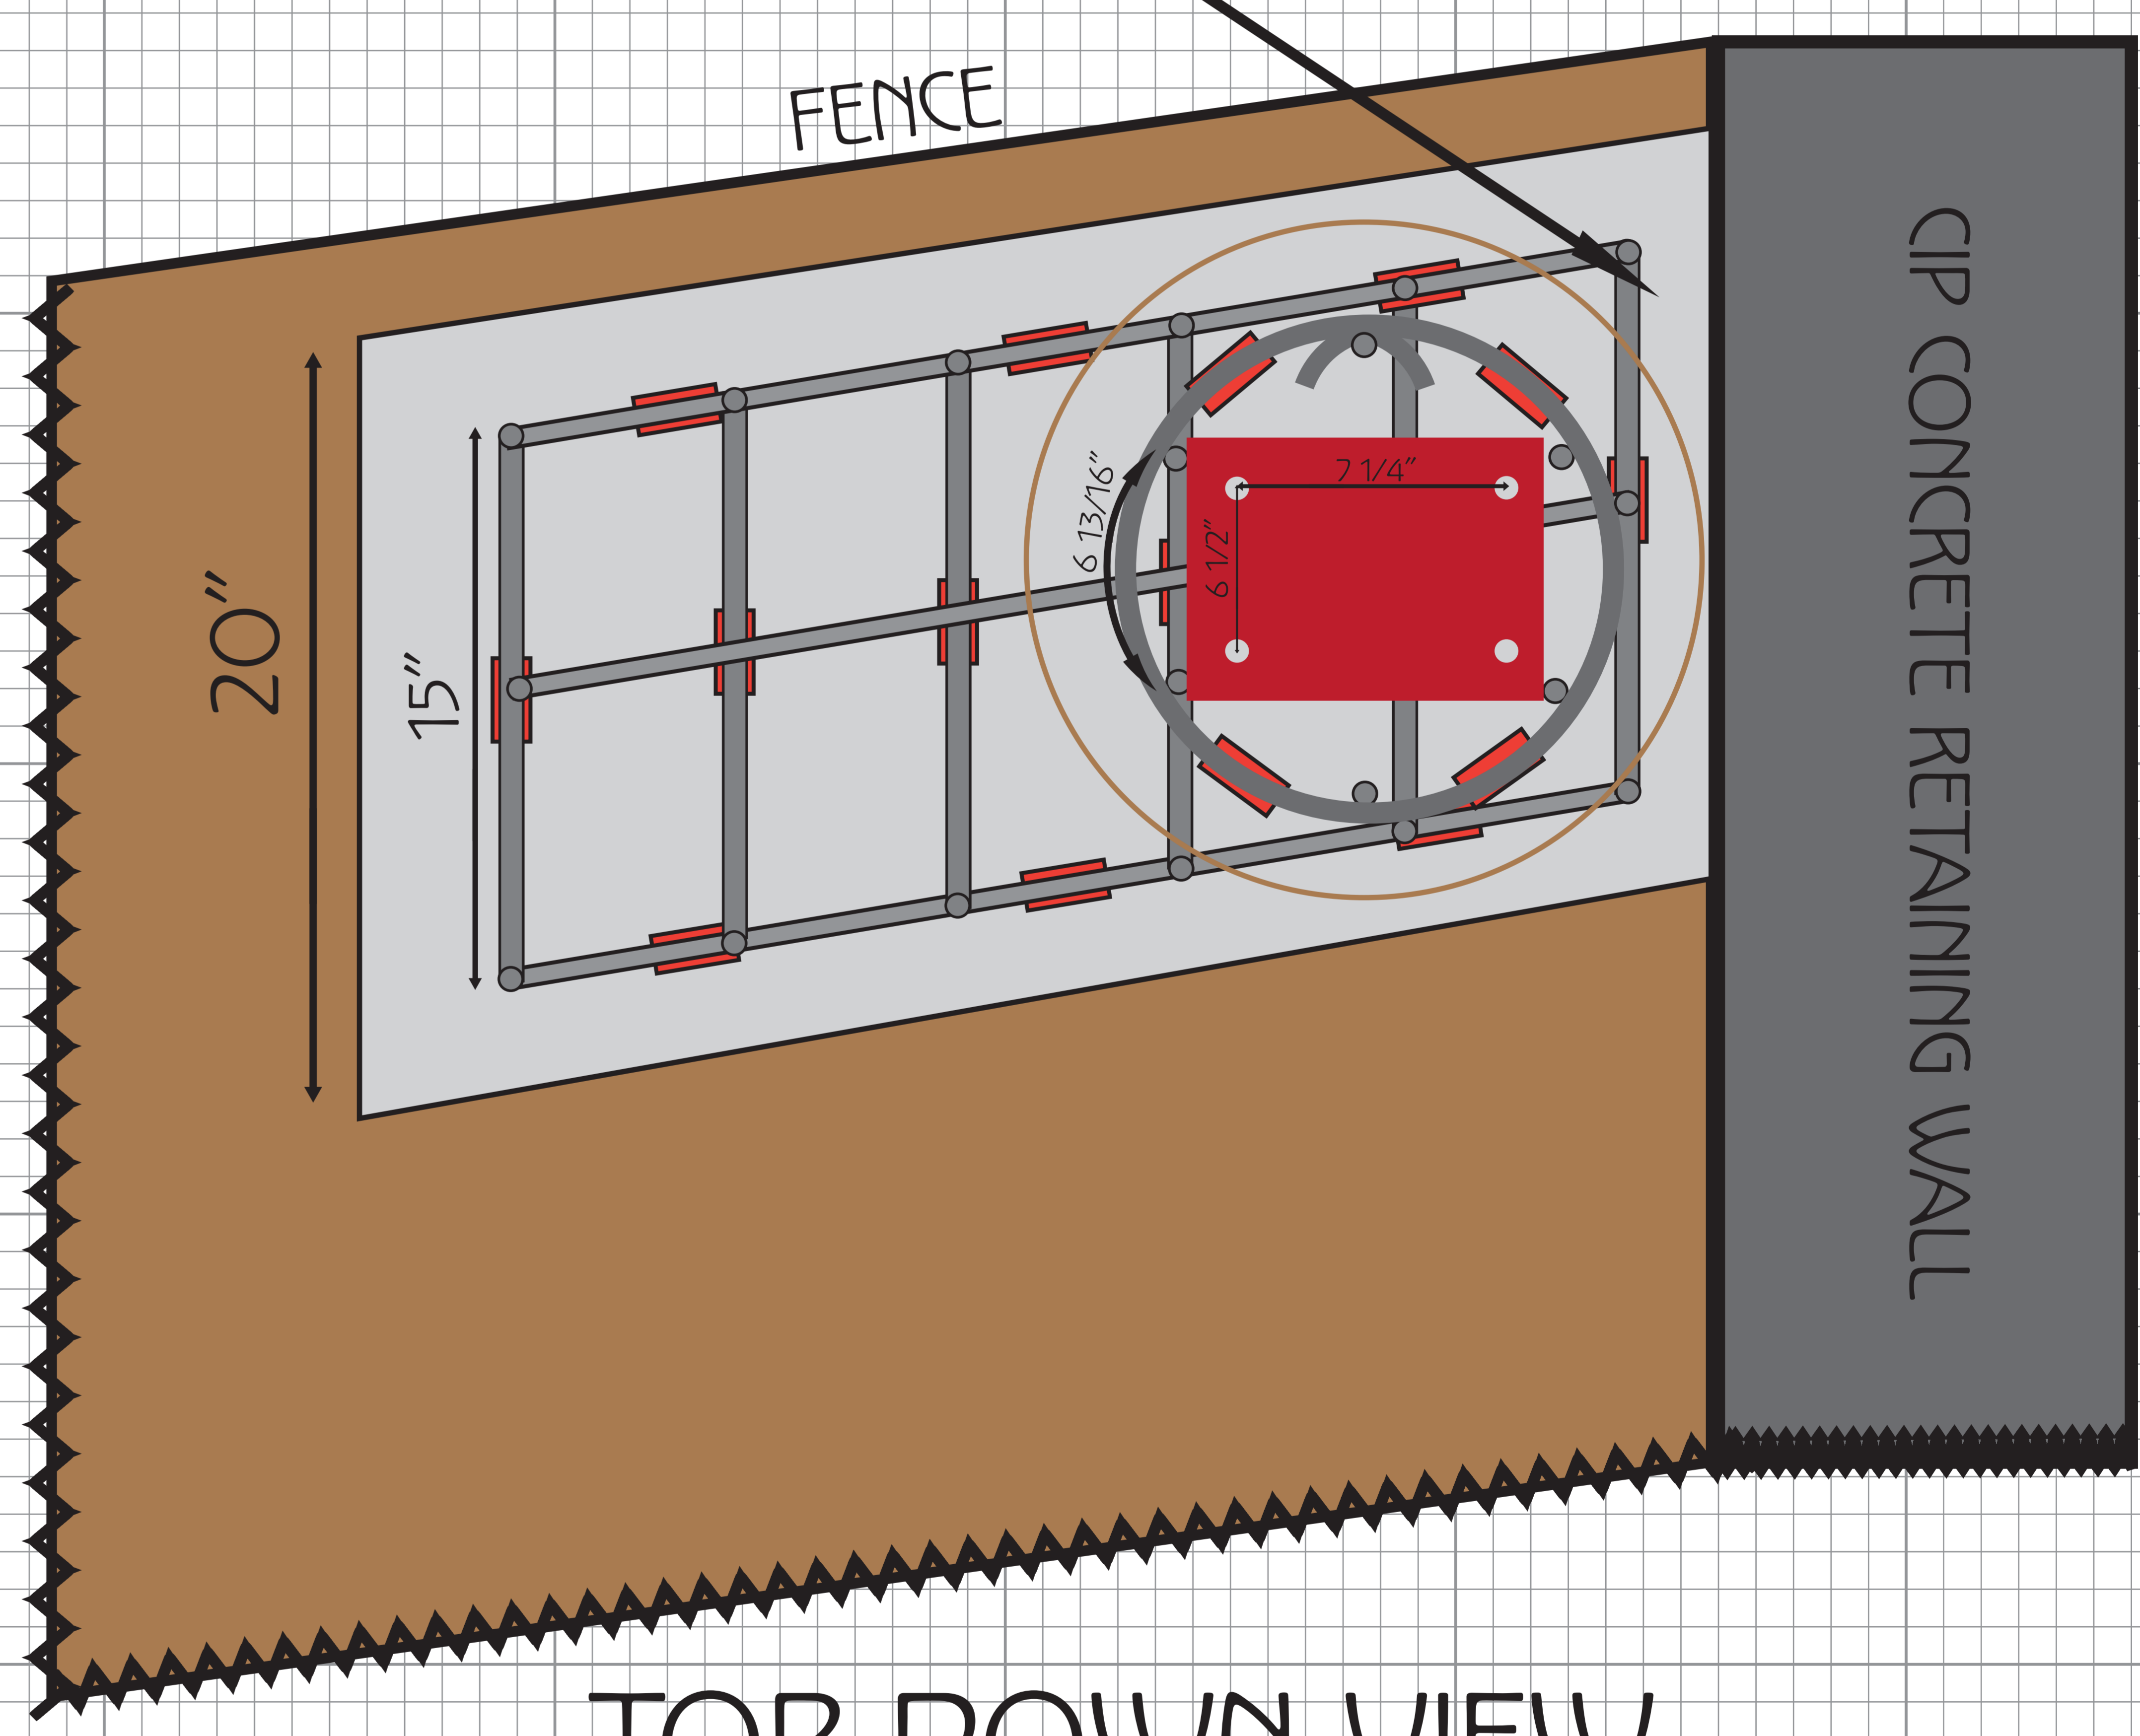

TOP DOWN VIEW

**SUPPLIES**

<i>Northern Tool</i>	
• Pickup Truck Crane	\$232.59
• 750/1500lb Electric Hoist	\$232.58
	<b>SUBTOTAL \$465.17</b>
<i>HD Supply White Cap</i>	
• 18" x 5' Sonotube	\$39
	<b>SUBTOTAL \$39</b>
<i>Venice Iron Works</i>	
• PAB5-24	\$75
	<b>SUBTOTAL \$75</b>
<i>Glendale Builders' Supply</i>	
• 9 x 10' #5 Rebar	\$32
• 15 x 13" #4 Rebar Stirrups	\$45
• 10 x 10' #4 Rebar	\$20
	<b>SUBTOTAL \$97</b>
<i>Quality Rentals</i>	
• Rebar Bender/Cutter	\$30
• Concrete Mixer	\$33
• Forklift	\$234
• Concrete Vibrator	\$50
	<b>SUBTOTAL \$347</b>
<i>Home Depot</i>	
• (60) Quickrete 60lb Concrete	\$212
• Rental truck	\$21
	<b>SUBTOTAL \$233</b>
	<b>PURCHASED TOTAL \$1256.17</b>